Posi-Shell ® ENVIRONMENTAL COATINGS

The most effective, cost-efficient and versatile cover system on the market

- Erosion Control
- Dust Control
- Waste Cover


Posi-Shell Posi-Shell

Posi-Shell® Base Mix

Net Wt. 50 lbs. (22.7 kg)





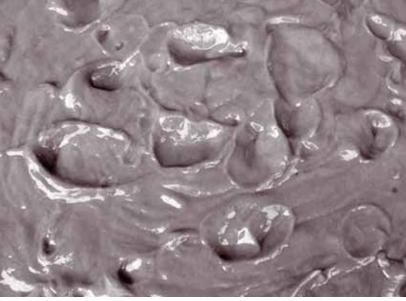

Contact us today for more information.



GeoGrow Hydroseed

Call: 01543 224800 Website: www.geogrow.co.uk Email: sales@geogrow.co.uk

Composition

Posi-Shell[®] is a patented blend of clay binders, reinforcing fibers, and polymers that, when mixed with water, produces a spray-applied mortar forming a thin layer of durable stucco. Posi-Shell will adhere to any surface or topography.

Posi-Shell's unique properties also enable the use of durability enhancers to achieve long-term coatings that remain resilient to erosion for more than a year.

Mixing and Application

Mixing is accomplished using LSC Equipment or standard hydroseeding units.

Mixing and application can be completed with one operator, and typically takes 45-60 minutes. Clean up takes about 10 minutes.

Brief Specifications

- Non-flammable
- Adheres to any surface
- Up to 95% water shed (run off)
- Durability from overnight to years with minimal maintenance

Packaging

Bags: 50 lb. (22.7 kg.) 60 Bags per pallet

Bulk Sacks: 500 lb (227 kg.) 4 sacks per pallet

Technology described herein may be covered by one or more patents or pending patent applications. See website for patent details. Posi-Shell is registered with the U.S. Patent and Trademark Offce.